

Air Nailer/Stapler

CHONGQING HYBEST TOOLS GROUP CO.,LTD.

ISO9001 CE





CHONGQING HYBEST TOOLS GROUP CO.,LTD.

Company Profile

Founded in 1993, Chongqing Hybest Tools Group is one of the largest air nailer/stapler manufacturers in Mainland China. We aim to provide our customers with "High Quality and Best Value" products.

The company covers an area of 36,000 square meters. Currently, it has over 700 employees, more than 100 sets of general and special equipments such as CNC, NC, etc. The annual production capacity of the air nailers/staplers is more than 2 million pieces. All the products are widely used in the fields of construction, furniture, decoration and packaging, well accepted by both professional and home users.

We pay special attention to the quality of our products and R & D of new products. We have got CE certification for our air nailers/staplers. We have 15 nailer/stapler patents in China, and several patents in USA. We also place great emphasis on the internal management and quality control. We have acquired ISO9001 certificate and operate in strict conformity to the ISO9001 procedures in the process from the product design, manufacturing to assembly. Therefore, the quality of our products is effectively controlled.

We sell our products in both domestic and overseas market. With large production capacity, excellent quality control, prompt delivery time, we win customers world wide. We would like to cooperate with our customers on OEM or ODM basis.

We will do our best to satisfy our customers' needs in terms of product quality, price, delivery date and service. At the same time, we will continuously improve our products to meet the new demands of the rapidly changing market. We sincerely hope that we can establish a long-term relationship with our customers all over the world to create a better future on a mutually beneficial basis.



CE
CERTIFICATES



ISO9001
CERTIFICATE





Tensile Strength Tester



CNC Machine



CMM Machine




RoHs Tester



HYBEST - High Quality Best Value

100mm Framing Nailer



FN21100P FN28100P FN34100P



● Driving depth adjustment



● Switch for single sequential or contact trip fire




Feature:


- Light weight and well balanced with magnesium body.
- Easy fast, rear load magazine made from anodized extruded aluminum.
- Muffled, 360° adjustable exhaust deflector.
- Adjust knob for either sequential or contact trip fire.
- No mar rubber tip device.
- Anti-dry fire mechanism
- Depth-of-drive adjustment to match application.

Application:

- Framing & sheathing
- Decking
- Subflooring
- Strapping & siding
- Pallets/pallet repair
- Crate & box assembly



Smooth Shank Screw Shank Ring Shank
Dia. 2.87-3.76mm
21 Degree Round Head




Smooth Shank Screw Shank Ring Shank
Dia. 2.87-3.76mm
28 Degree & 34 Degree Clipped Head

Stick Nails			
Head	Full Round Head	Clipped Head	
Collation Angle	21°	28°	34°
Collation Type	Plastic	Paper, Wire	Paper
Length	50~100mm	50~100mm	50~100mm
Shank Diameter	2.87~3.76mm	2.87~3.76mm	2.87~3.76mm

Model	Weight (kg)	Dimension (mm)	Angle	Load Capacity (pcs)	Operating Air Pressure (PSI)
FN21100P	3.9	530×124×374	21°	65~75	70~120
FN28100P	3.9	490×124×374	28°	75~95	70~120
FN34100P	3.88	470×150×374	34°	75~95	70~120



●360° adjustable exhaust deflector



●Quick clear jam release





●Anti-dry fire mechanism

CHONGQING HYBEST TOOLS GROUP CO.,LTD.

90mm Framing Nailer

FN2190P FN2890P FN3490P




Feature:


- Light weight and well balanced with magnesium body.
- Easy fast, rear load magazine made from anodized extruded aluminum.
- Adjustable depth control
- Muffled, 360° adjustable exhaust deflector.
- Adjust knob for either sequential or contact trip fire.
- No mar rubber tip device
- Anti-dry fire mechanism
- Depth-of-drive adjustment to match application.

Application:

- Framing & sheathing
- Decking
- Subflooring
- Strapping & siding
- Pallets/pallet repair
- Crate & box assembly



Dia.2.87-3.76mm
21 Degree Round Head




Dia.2.87-3.76mm
28 Degree&34 Degree Clipped Head

Stick Nails

Head	Full Round Head	Clipped Head	
Collation Angle	21°	28°	34°
Collation Type	Plastic	Paper, Wire	Paper
Length	50~90mm	50~90mm	50~90mm
Shank Diameter	2.87~3.76mm	2.87~3.76mm	2.87~3.76mm

Model	Weight (kg)	Dimension (mm)	Angle	Load Capacity (pcs)	Operating Air Pressure (PSI)
FN2190P	3.8	530×124×364	21°	65~75	70~120
FN2890P	3.8	490×124×364	28°	75~95	70~120
FN3490P	3.7	470×150×364	34°	75~95	70~120

HYBEST - High Quality Best Value




● Driving depth adjustment



● Switch for single sequential or contact trip fire

18GA Brad Nailer Series

F32P



Brad Nails	
Gauge Size	18 ga.
Length	10~32mm
Thickness	1mm
Width	1.25mm




Feature:

- Quick clear jam release.
- 360° air deflector.
- Adjustable depth control
- No mar rubber tip device.
- Quick and easy side loading system.
- Light weight die-casting magnesium body prevents hand from fatigue during long-playing operation.

Application:

- Crafts
- Staircases
- Molding
- Paneling
- Cabinet work

F50P



Brad Nails	
Gauge Size	18 ga.
Length	20~50mm
Thickness	1mm
Width	1.25mm



Feature:

- Quick clear jam release.
- 360° air deflector.
- Adjust knob for either sequential or contact trip fire.
- No mar rubber tip device.
- Quick and easy side loading system.
- Low nails view window.
- Light weight die-casting magnesium body prevents hand from fatigue during long-playing operation.


Application:

- Crafts
- Paneling
- Interior finish and trim
- Custom cabinets
- Moldings & crafts


Model	Weight (kg)	Dimension (mm)	Gauge	Load Capacity (pcs)	Operating Air Pressure (PSI)
F32P	1.08	273×67×228	18	100	60~100
F50P	1.22	273×67×249	18	100	60~100



● 360° adjustable exhaust deflector



● Quick clear jam release




● Anti-dry fire mechanism

CHONGQING HYBEST TOOLS GROUP CO.,LTD.

18GA Stapler Series

9025P

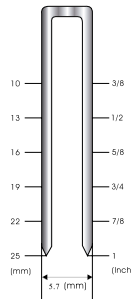

Staples	
Gauge Size	18 ga.
Crown	5.7mm
Length	10~25mm
Thickness	1mm
Width	1.25mm




Feature:

- Quick clear jam release.
- Adjustable depth control
- 360° air deflector.
- No mar rubber tip device.
- Light weight die-casting magnesium body prevents hand from fatigue during long-playing operation.

Application:

- Paneling
- Cabinet work
- Floor under layment.
- Door and window casing.

9032P

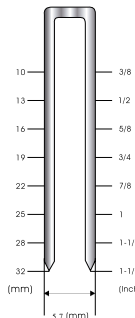

Staples	
Gauge Size	18 ga.
Crown	5.7mm
Length	10~32mm
Thickness	1mm
Width	1.25mm



Feature:


- Quick clear jam release.
- 360° air deflector.
- Adjustable depth control
- No mar rubber tip device.
- Light weight die-casting magnesium body prevents hand from fatigue during long-playing operation.

Application:

- Paneling
- Cabinet work
- Floor under layment.
- Door and window casing.

Model	Weight (kg)	Dimension (mm)	Gauge/Shank Diameter	Load Capacity (pcs)	Operating Air Pressure (PSI)
9025P	1.1	273×67×224	18	100	60~100
9032P	1.24	273×67×231	18	100	60~100

HYBEST - High Quality Best Value




● Driving depth adjustment



● Switch for single sequential or contact trip fire

18GA Stapler Series

S9032P



Staples	
Gauge Size	18 ga.
Crown	5.7mm
Length	10~32mm
Thickness	1mm
Width	1.25mm




Feature:

- 360° air deflector.
- Contact trip actuation for industrial use
- Lightweight die-casting magnesium body prevents hand from fatigue during long-playing operation.


Application:

- Flooring

9040P



Staples	
Gauge Size	18 ga.
Crown	5.7mm
Length	16~40mm
Thickness	1mm
Width	1.25mm



Feature:

- Quick clear jam release.
- 360° air deflector.
- Adjust knob for either sequential or contact trip fire.
- No mar rubber tip device.
- Light weight die-casting magnesium body prevents hand from fatigue during long-playing operation.


Application:

- Paneling
- Cabinet work
- Floor under layment.
- Door and window casing.

Model	Weight (kg)	Dimension (mm)	Gauge	Load Capacity (pcs)	Operating Air Pressure (PSI)
S9032P	1.5	273×76×240	18	100	60~100
9040P	1.74	302×88×253	18	100	60~100



●360° adjustable
exhaust deflector



●Quick clear jam release




●Anti-dry fire mechanism

CHONGQING HYBEST TOOLS GROUP CO.,LTD.

21GA Fine Wire Stapler

8016P



Staples	
Gauge Size	21 ga.
Crown	12.7mm
Length	6~16mm
Thickness	0.95mm
Width	0.65mm

Feature:


- Compact and light weight die-casting aluminium body.
- Powerful strength and excellent durability.

Application:

- trim
- decoration
- furniture

22GA Fine Wire Stapler

7116P

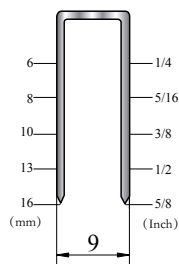

Staples	
Gauge Size	22 ga.
Crown	9mm
Length	6~16mm
Thickness	0.55mm
Width	0.75mm

Feature:


- Compact and light weight die-casting aluminium body.
- Powerful strength and excellent durability.

Application:

- Furniture
- Upholstery and bedding
- Picture frame backing
- Tacking
- Home insulation

Model	Weight (kg)	Dimension (mm)	Gauge	Load Capacity (pcs)	Operating Air Pressure (PSI)
8016P	0.84	225×45×154	21	150	60~100
7116P	0.84	225×45×154	22	180	60~100

HYBEST - High Quality Best Value




● Driving depth adjustment



● Switch for single sequential or contact trip fire

18GA Combination Nailer / Stapler Series

F32/9032P



Brad Nails		Staples	
Gauge Size	18 ga.	Gauge Size	18 ga.
Crown		Crown	5.7mm
Length	10~32mm	Length	10~32mm
Thickness	1mm	Thickness	1mm
Width	1.25mm	Width	1.25mm




Feature:

- Drive both brads and staples.
- Quick clear jam release.
- 360° air deflector.
- Adjustable depth control
- No mar rubber tip device.
- Light weight die-casting magnesium body prevents hand from fatigue during long-playing operation.

Application:

- Interior decorating.
- Dry wall building.
- Carpentry
- Joinery
- Shop and fair stand fitting etc.

F50/9040P



Brad Nails		Staples	
Gauge Size	18 ga.	Gauge Size	18 ga.
Crown		Crown	5.7mm
Length	20~50mm	Length	16~40mm
Thickness	1mm	Thickness	1mm
Width	1.25mm	Width	1.25mm



Feature:

- Drive both brads and staples.
- Quick clear jam release.
- 360° air deflector.
- Adjustable depth control
- No mar rubber tip device.
- Light weight die-casting magnesium body prevents hand from fatigue during long-playing operation.


Application:

- Interior decorating.
- Dry wall building.
- Carpentry
- Joinery
- Shop and fair stand fitting etc.


Model	Weight (kg)	Dimension (mm)	Gauge	Load Capacity (pcs)	Operating Air Pressure (PSI)
F32/9032P	1.25	273×67×231	18	100	60~100
F50/9040P	1.33	273×67×257	18	100	60~100



●360° adjustable exhaust deflector



●Quick clear jam release




●Anti-dry fire mechanism

CHONGQING HYBEST TOOLS GROUP CO.,LTD.

16GA Finish Nailer

T50P



Brad Nails

Gauge Size	16 ga.
Length	20~50mm
Thickness	1.4mm
Width	1.6mm




Feature:

- Light weight die-casting magnesium body prevents hand from fatigue during long-playing operation.
- Adjustable depth control
- 360° air deflector
- Adjust knob for either sequential or contact trip fire.
- Powerful strength and excellent durability
- Contact trip actuation for industrial use

Application:



- trim
- decoration
- furniture

T64P



Brad Nails

Gauge Size	16 ga.
Length	20~64mm
Thickness	1.4mm
Width	1.6mm



Feature:


- Quick clear jam release.
- Adjustable depth control
- 360° air deflector.
- Adjust knob for either sequential or contact trip fire.
- No mar rubber tip device.
- Anti-dry fire mechanism
- Light weight die-casting magnesium body prevents hand from fatigue during long-playing operation.

Application:

- Cabinets
- Furniture
- Paneling
- Interior and exterior trimming
- Door and window casings.

Model	Weight (kg)	Dimension (mm)	Gauge	Load Capacity (pcs)	Operating Air Pressure (PSI)
T50P	1.7	302×88×270	16	100	60~100
T64	1.76	294×88×295	16	80	70~120

HYBEST - High Quality Best Value




● Driving depth adjustment




● Switch for single sequential or contact trip fire

16GA Combination Nailer / Stapler Series

FST64P



Brad Nails		Staples	
Gauge Size	18 ga.	16 ga.	18 ga.
Crown			5.7mm
Length	20~50mm	20~64mm	16~40mm
Thickness	1mm	1.4mm	1mm
Width	1.25mm	1.6mm	1.25mm



Feature:


- Lightweight die-casting magnesium body prevents hand from fatigue during long-playing operation.
- No mar rubber tip device
- Adjustable depth control
- 360° air deflector
- Adjust knob for either sequential or contact trip fire
- Combination of 16 gauge finish nailer, 18 gauge brad nailer and 18 gauge stapler

Application:

- Interior decorating
- Dry wall building
- Carpentry
- Joinery
- Shop and fair stand fitting etc.

13GA Concrete T Nailer

ST64P



Concrete T Nails	
Gauge Size	13 ga.
Length	18~64mm
Shank Diameter	2.2mm



Feature:

- Light weight die-casting magnesium body prevents hand from fatigue during long-playing operation.
- No mar rubber tip device.
- Adjustable depth control
- 360° air deflector
- Adjust knob for either sequential or contact trip fire.
- Powerful strength and excellent durability.


Application:

- trim
- decoration
- furniture

Model	Weight (kg)	Dimension (mm)	Gauge	Load Capacity (pcs)	Operating Air Pressure (PSI)
FST64P	2.1	313×88×298	16 gauge & 18 gauge combination	100	60~120
ST64P	2.75	310×108×290	13	80	70~120



●360° adjustable exhaust deflector



●Quick clear jam release




●Anti-dry fire mechanism

CHONGQING HYBEST TOOLS GROUP CO.,LTD.

15GA Angle Finish Nailer

DA1564P



Angle Finish Nails	
Gauge Size	15 ga.
Length	32~64mm
Shank Diameter	1.84mm
Collation Angle	34°



Feature:


- Quick clear jam release.
- Adjustable depth control
- 360° air deflector.
- Adjust knob for either sequential or contact trip fire.
- No mar rubber tip device.
- Anti-dry fire mechanism
- Light weight die-casting magnesium body prevents hand from fatigue during long-playing operation.

Application:

- Paneling
- Trim
- Door and window casing
- Furniture
- Decoration
- Upholstery

16GA Large Stapler

N851HDP



Staples	
Gauge Size	16 ga.
Crown	10.8mm
Length	19~51mm
Thickness	1.4mm
Width	1.6mm



Feature:


- Quick clear jam release.
- Adjustable depth control
- 360° air deflector.
- Adjust knob for either sequential or contact trip fire.
- No mar rubber tip device.
- Lightweight die-casting magnesium body prevents hand from fatigue during long-playing operation.

Application:

- Sheathing
- Subflooring
- Furniture frames
- Pallets
- Roof decking
- crates

Model	Weight (kg)	Dimension (mm)	Gauge	Load Capacity (pcs)	Operating Air Pressure (PSI)
DA1564P	1.83	331×100×302	15	100	70~120
N851HDP	2.58	376×108×282	16	160	70~120

HYBEST - High Quality Best Value




● Driving depth adjustment



● Switch for single sequential or contact trip fire

16GA Large Stapler

N851P



Staples	
Gauge Size	16 ga.
Crown	10.8mm
Length	19~51mm
Thickness	1.4mm
Width	1.6mm



Feature:


- Quick clear jam release.
- Adjustable depth control
- 360° air deflector.
- Adjust knob for either sequential or contact trip fire.
- No mar rubber tip device.
- Light weight die-casting magnesium body prevents hand from fatigue during long-playing operation.

Application:

- Sheathing
- Subflooring
- Furniture frames
- Pallets
- Roof decking
- crates

11GA Coil Roofing Nailer

CRN45P



Nails	
Head Diameter	10mm
Shank Diameter	3.05mm
Length	22~45mm
Collation Angle	15°
Collation Type	Wire



Feature:

- Adjustable depth control
- 360° air deflector
- Adjust knob for either sequential or contact trip fire
- Light weight die-casting magnesium body prevents hand from fatigue during long-playing operation.


Application:

- Asphalt & fiberglass shingles
- Fastening lath wire on plywood
- Siding installation
- Wooden box assembly

Model	Weight (kg)	Dimension (mm)	Gauge	Load Capacity (pcs)	Operating Air Pressure (PSI)
N851P	2.02	368×97×290	16	150	70~120
CRN45P	2.24	291×124×289	11	120	70~120



● 360° adjustable exhaust deflector



● Quick clear jam release




● Anti-dry fire mechanism


CHONGQING HYBEST TOOLS GROUP CO.,LTD.

Coil Nailer Series

HCN57P



Nails	
Head Diameter	5~6mm
Shank Diameter	2.1~2.5mm
Length	25~57mm
Collation Angle	15°
Collation Type	Wire




Feature:

- Adjustable depth control
- 360° air deflector.
- Adjust knob for either sequential or contact trip fire.
- No mar rubber tip device.
- Light weight die-casting magnesium body prevents hand from fatigue during long-playing operation.

Application:

- Pallets
- Crating
- Fences
- Siding
- Decking
- Sheathing

HCN65P



Nails		
Head Diameter	5~7mm	5~7mm
Shank Diameter	2.3~2.9mm	2.3~2.9mm
Length	32~65mm	32~65mm
Collation Angle	15°	
Collation Type	Wire	Plastic Sheet



Feature:


- Adjustable depth control
- 360° air deflector.
- Adjust knob for either sequential or contact trip fire.
- No mar rubber tip device.
- Light weight die-casting magnesium body prevents hand from fatigue during long-playing operation.

Application:

- Siding
- Fencing
- Sheathing
- Roof decking
- Furring
- Exterior trim
- Subflooring
- Exterior deck
- Strapping

Model	Weight (kg)	Dimension (mm)	Shank Diameter	Load Capacity (pcs)	Operating Air Pressure (PSI)
HCN57P	2.35	305×130×302	φ 2.1~ φ 2.5	300~350	70~120
HCN65P	2.48	305×130×312	φ 2.3~ φ 2.9	250~350	70~120

HYBEST - High Quality Best Value




● Driving depth adjustment



● Switch for single sequential or contact trip fire

Coil Nailer Series

HCN90P

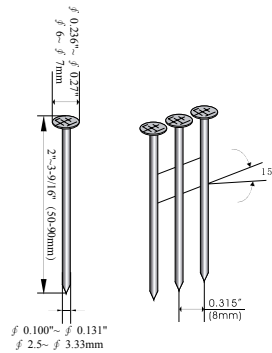

Nails	
Head Diameter	6~7mm
Shank Diameter	2.5~3.33mm
Length	50~90mm
Collation Angle	15°
Collation Type	Wire



Feature:


- Adjustable depth control
- 360° air deflector.
- Adjust knob for either sequential or contact trip fire.
- No mar rubber tip device.
- Light weight die-casting magnesium body prevents hand from fatigue during long-playing operation.

Application:

- Pallets
- Crating
- Packing
- Fences
- Decking
- Sheathing
- Furring
- Siding

Pallet Making Series

HPCN55



Nails	
Head Diameter	≤6mm
Shank Diameter	2.1~2.3mm
Length	25~57mm
Collation Angle	15°
Collation Type	Wire



Feature:

- Powerful and durable aluminium housing & cylinder cap.
- Direction adjustable air deflector.
- Hardened nylon nail housing.
- Contact trip actuation for industrial use


Application:

- Pallet making and packing.


Model	Weight (kg)	Dimension (mm)	Shank Diameter	Load Capacity (pcs)	Operating Air Pressure (PSI)
HCN90P	3.50	355×130×368	φ 2.5~ φ 3.33	225~300	70~120
HPCN55	2.7	290×132×283	φ 2.1~ φ 2.3	300~400	70~120



●360° adjustable exhaust deflector




●Quick clear jam release



●Anti-dry fire mechanism

CHONGQING HYBEST TOOLS GROUP CO.,LTD.

HPCN70



Nails	
Head Diameter	5~7mm
Shank Diameter	2.3~2.9mm
Length	40~70mm
Collation Angle	15°
Collation Type	Wire


Feature:

- Powerful and durable aluminium housing & cylinder cap.
- Durable front exhaust design.
- Hardened nylon nail housing.
- Contact trip actuation for industrial use

Application:

- Pallet making and packing.

HPCN83



Nails	
Head Diameter	5~7mm
Shank Diameter	2.5~3.33mm
Length	40~83mm
Collation Angle	15°
Collation Type	Wire



Feature:

- Powerful and durable aluminium housing & cylinder cap.
- Direction adjustable air deflector.
- Hardened nylon nail housing.
- Contact trip actuation for industrial use


Application:

- Pallet making and packing.


Model	Weight (kg)	Dimension (mm)	Shank Diameter	Load Capacity (pcs)	Operating Air Pressure (PSI)
HPCN70	3.7	330×132×308	φ 2.3~ φ 2.9	250 ~ 350	70~120
HPCN83	3.9	330×132×340	φ 2.5~ φ 3.33	250 ~ 300	70~120



●360° adjustable
exhaust deflector



●Quick clear jam release



●Anti-dry fire mechanism


CHONGQING HYBEST TOOLS GROUP CO.,LTD.

Air Plug Models

American Market



ZS422J-32A

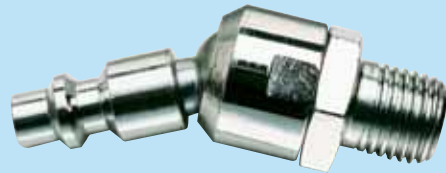

1/4PT-00A

European Market



8016-26



ZS422J-32C



ZS422J-32E



ZS422J-32D

Asian Market



ZS422J-32

ISO9001 CE

HYBEST

Chongqing Hybest Tools Group Co., Ltd.
Add: #157 Jienan Street, Banan District, Chongqing, 401346 China
E-mail: export@cqhyjx.com
hybest@hybest.com



Air Nailer/Stapler
MANUFACTURER

[Http://www.hybest.com](http://www.hybest.com)